



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : E05F 15/00, H01L 41/087		A1	(11) International Publication Number: WO 00/70179
			(43) International Publication Date: 23 November 2000 (23.11.00)
(21) International Application Number: PCT/JP00/03003		Yuko [JP/JP]; 71-2, Izumihara-cho, Yamatokoriyama-shi, Nara 639-1056 (JP).	
(22) International Filing Date: 11 May 2000 (11.05.00)		(74) Agents: IWAHASHI, Fumio et al.; Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).	
(30) Priority Data:		(81) Designated States: CN, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
11/132250	13 May 1999 (13.05.99)	JP	
11/156121	3 June 1999 (03.06.99)	JP	
11/235039	23 August 1999 (23.08.99)	JP	
(71) Applicant (for all designated States except US): MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): VOGINO, Hiroyuki [JP/JP]; 2-35, Amagatsuji Nakamachi, Nara-shi, Nara 630-8024 (JP); NAKATANI, Naofumi [JP/JP]; 3-3-4-208, Nishimiyahara, Yodogawa-ku, Osaka-shi, Osaka 532-0004 (JP); YOSHINO, Koji [JP/JP]; 647-15, Nukatabekitamachi, Yamatokoriyama-shi, Nara 639-1037 (JP); NAGAI, Takeshi [JP/JP]; 1673-4, Owada, Kawai-cho, Kitakatsuragi-gun, Nara 636-0093 (JP); KANAZAWA, Narutoshi [JP/JP]; 5-9-409, Shinkanaoka-cho 2-cho, Sakai-shi, Osaka 591-8021 (JP); TTO, Masahiko [JP/JP]; 129-10-404, Shinga-cho, Kashihara-shi, Nara 634-0006 (JP); FUJII,			
Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.			

(54) Title: PRESSURE-SENSITIVE SENSOR, OBJECT DETECTING DEVICE, AND OPENING-CLOSING DEVICE

(57) Abstract

In a pressure-sensitive sensor for detecting seizure of an object in the window frame or the like, support means (13) is more flexible than a piezoelectric sensor (12), and the support means (13) is easily deformed together with the piezoelectric sensor (12) without impeding the deformation of the piezoelectric sensor (12), and an output signal is issued from the piezoelectric sensor (12) depending on this deformation. Accordingly, when detecting the contact of an object with a pressure-sensitive sensor (4) by a judging device, the pressure-sensitive sensor (4) for generating an output signal of a sufficient magnitude for detection can be presented.

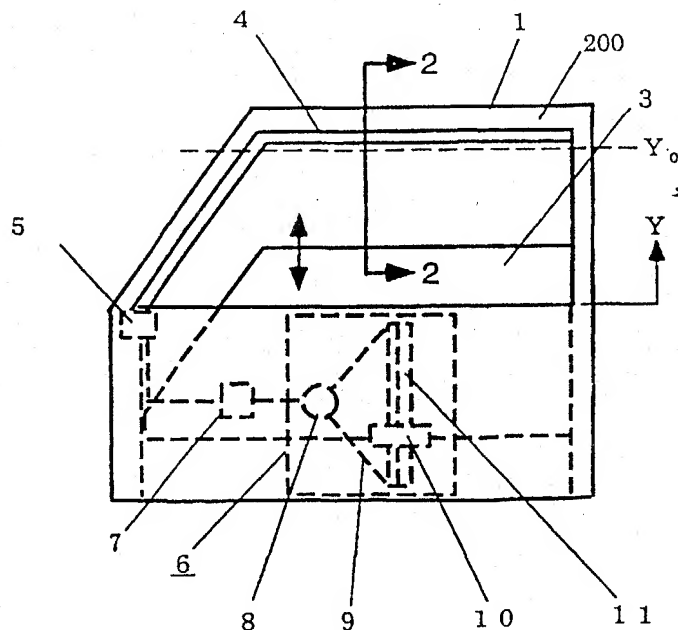

Rec'd PCT/PTO 22 OCT 2001